


SERIE RV

FRANTUMATORI ROTANTI

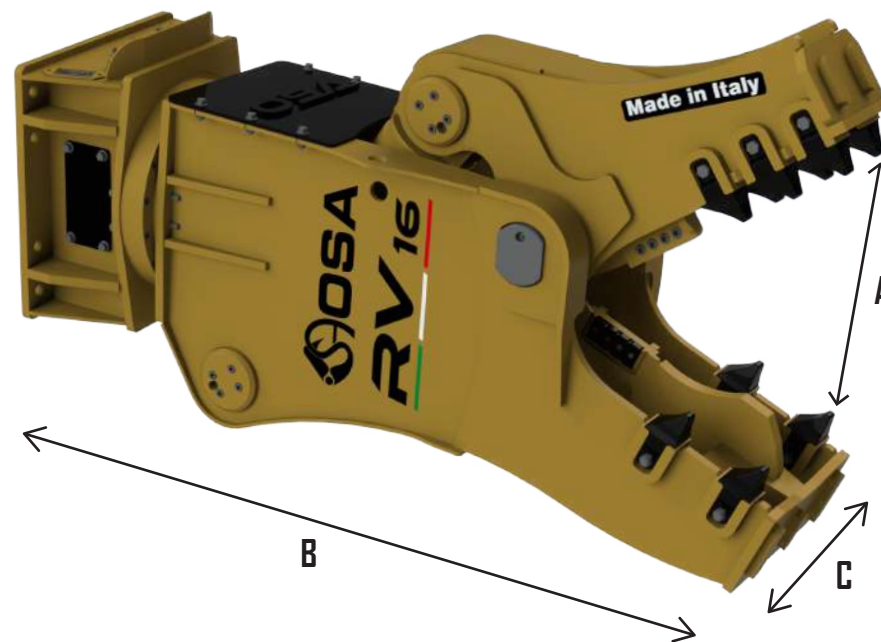

MODELLO	U.M.	RV 6	RV 10	RV 16	RV 20	RV 25	RV 30	RV 40	RV 60	RV 80	RV 110
APERTURA (A)	mm	520	630	790	840	880	1010	1130	1280	1350	1720
OPENING (A)	in.	20	25	31	33.5	34.6	39.7	45	50	53	68
LUNGHEZZA (B)	mm	1600	1815	2120	2300	2400	2660	2850	3230	3400	3800
LENGHT (B)	in.	63	71.5	83.5	91	94.5	105	112	127	134	150
PROFONDITA' (C)	mm	340	390	500	500	530	530	550	660	620	650
DEPTH (C)	in.	13.4	15.5	19.7	19.7	20.8	20.8	21.65	25.98	24.4	25.6
PESO ESCAVATORE	Ton	7/12	9/15	15/20	20/26	25/32	30/40	38/55	50/80	70/90	90/120
EXCAVATOR WEIGHT	lbs	15400/26500	19900/33000	33000/44000	44000/57300	55000/70500	66000/88000	84000/120000	110000/176000	155000/200000	200000/266000
PESO	Kg	660	1105	1710	2000	2500	2970	3940	6000	7800	9950
EQUIPMENT WEIGHT	lbs	1455	2436	3769	4400	5511	6547	8333	13228	17196	21936
PRESSIONE OLIO	Bar	250	310	340	340	340	340	340	340	340	340
OIL PRESSURE	psi	3625	4496	4931	4931	4931	4931	4931	4931	4931	4931
PORTATA OLIO	l/min	80/100	100/150	150/220	210/260	250/300	280/320	300/350	330/400	400/500	500/600
OIL CAPACITY	gal/min	21/26	26/39	39/58	55/68	66/79	74/84	79/92	87/105	106/132	132/158
PRESSIONE ROTAZIONE	Bar	60	120/130	120/130	120/130	120/130	120/130	120/130	120/130	120/130	120/130
ROTATION OIL PRESSURE	psi	870	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885	1740/1885
PORTATA ROTAZIONE	L/min	20	20/30	20/30	20/30	50/60	50/60	50/60	50/60	70/80	70/80
ROTATION OIL CAPACITY	gal/min	5	5/8	5/8	5/8	13/16	13/16	13/16	13/16	18/21	18/21
PESO TOTALE A LAVORO	Kg.	710	1200	1850	2200	2700	3270	4300	6500	8500	10945
OPERATING TOTAL WEIGHT	lbs	1565	2645	4078	4850	5952	7209	9480	14330	18850	24130